


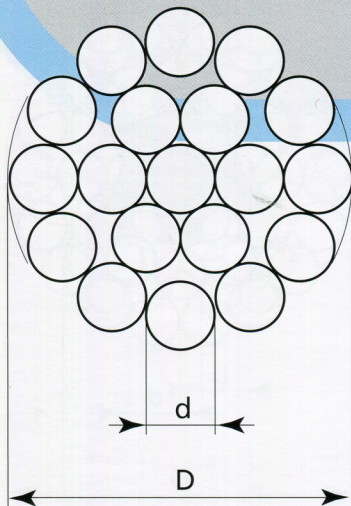

FUNE SPIROIDALE A 19 FILI

UNI - 7690
TIPO - I E L T

Formazione 12+6+1 = 19

Usi: sospensioni - Impianti elettrici

Diametro della Funo	Diametro nominale dei fili	Sezione metallica totale	Peso approssim. al mt.	Carico di rottura minimo in kg. con fili della resist.Unit.	
D	d	S		R in kg. mmq.	
mm.	mm.	mmq	gr.	R 160	R 180
1.20	0.24	0.86	7	—	140
1.50	0.30	1.38	11	—	185
1.90	0.38	2.16	17	—	350
2.00	0.40	2.39	19	—	385
2.50	0.50	3.73	31	—	600
3.00	0.60	5.37	44	—	870
3.50	0.70	7.31	60	—	1150
4.00	0.80	9.55	79	—	1500
4.50	0.90	12.10	100	1750	1950
5.00	1.00	14.20	124	2150	2400
6.00	1.20	21.50	176	3150	3450
7.00	1.40	29.20	240	4250	4700
8.00	1.60	38.20	310	5600	6100
9.00	1.80	48.30	400	7100	7800
10.00	2.00	59.70	490	8700	9600
11.00	2.20	72.20	600	10500	11600
12.00	2.40	86.00	710	12500	13800
13.00	2.60	101.00	830	14800	16300
14.00	2.80	117.00	970	17100	18900